

# SL20-22MB Venetian

ScreenLine® SL20-22MB is a **motorised** system with **raising and tilting** function for **venetian** blinds incorporated within 20-mm or 22-mm insulating glass units.

The blind is raised or lowered via a device consisting of a brushless motor controlled by a wide range of control units (compatible with the main BMS systems), which allows the simultaneous and synchronised operation of several blinds and the accurate tilting of the slats.

The motor and the entire electronic blind management system are positioned within the head rail, on a specially designed slide that will reduce vibrations, thus making the system very silent.

No other control device is applied on glass or window frame, since the motor is activated by means of wall-mounted push buttons or remote control (options). The purity of the aesthetic appearance and the high technical performances of the system make it particularly suited to **prestigious projects**.


The kit can be assembled, mounted and transported very quickly and easily.

It ensures with time the insulating properties of the insulating glass unit, notably protection from dirt or weather conditions.


The system is supplied with warm edge spacer bars as standard.



## COLOUR RANGE

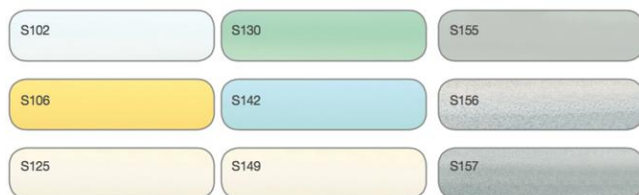

## FEASIBILITY CHARTS

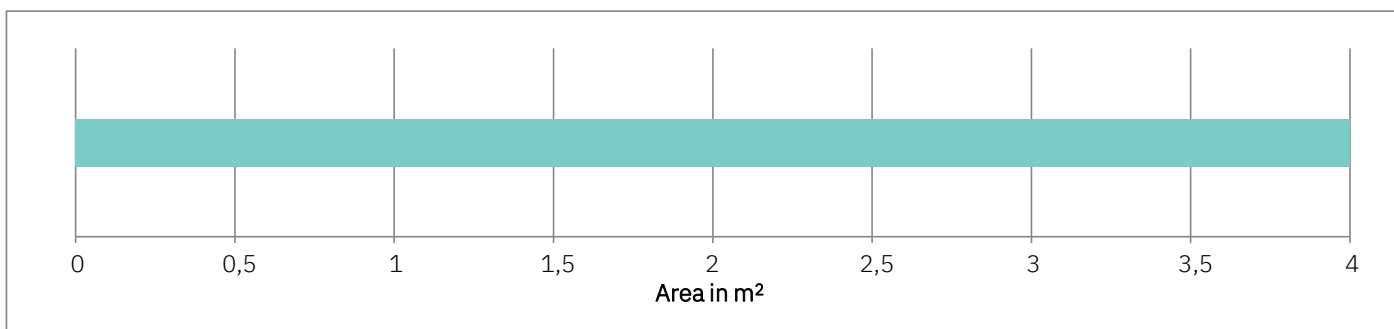

### Possible dimensions:

W min = 300 mm      W max = 2000 mm  
H min = 300 mm      H max = 2600 mm

### Maximum height possible according to width

with W from 300 to 350 mm      H max = 1670 mm\*  
with W from 351 to 400 mm      H max = 2020 mm\*  
with W from 401 to 2000 mm      H max = 2600 mm\*\*

\* Up to H = 2600 mm, blind supplied with tilt-only function and locked bottom rail

\*\* For areas from 4.01 m<sup>2</sup> to 5.2 m<sup>2</sup>, blind supplied with tilt-only function and completely raised