

# SL20-22W Smart Venetian

ScreenLine® SL20-22W Smart is a battery-operated motorised system with **raising and tilting** function for **venetian** blinds incorporated within 20-mm or 22-mm insulating units.

The blind is raised or lowered via a touch control device that is magnetically attached to the window or by remote control (option).

The battery can be recharged in two alternative ways: by means of a micro-USB **battery charger** or through an **external solar panel**, thus automatically and continuously.

The system can be fitted quickly and easily and is applicable to all types of window frames, even existing ones; no wires or electrical contacts are required, and internal glass thickness is irrelevant.

ScreenLine® SL20-22W is halfway between a manual system and a traditional motorised system. It is suited for every environment: homes, offices, public buildings, etc., as it needs no maintenance. It ensures with time the insulating properties of the insulating glass unit, notably protection from dirt or weather conditions. Furthermore, when supplied with a solar panel, it is also beneficial in terms of **energy saving**.

The battery module is treated with a Sanitized®\* patented finish, which provides a long-lasting antimicrobial protection function

The system is supplied with warm edge spacer bars as standard.


\* Active biocidal substance: silver borophosphate glass



## COLOUR RANGE



## FEASIBILITY CHARTS

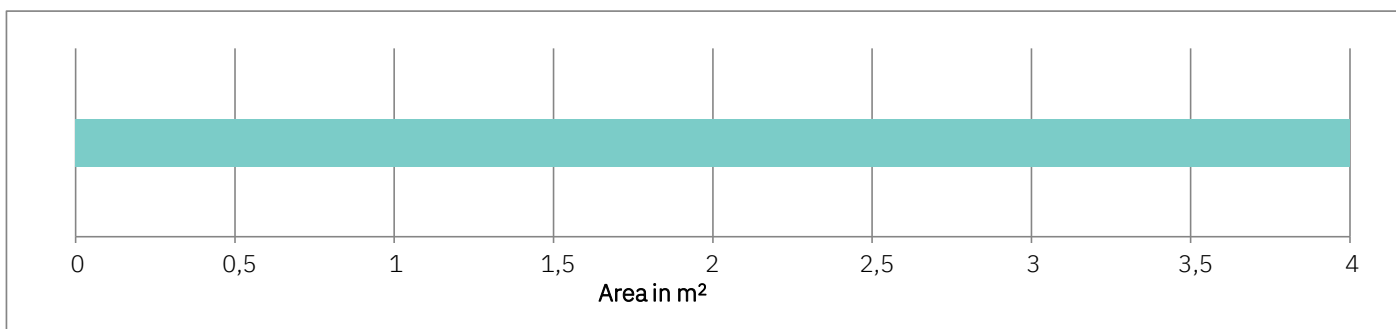

Maximum height possible according to width  
Blind with raising and tilting functions

Possible dimensions:

W min = 300 mm    W max = 2000 mm  
H min = 300 mm    H max = 2600 mm

with W from	300	to	350	mm, H max =	1670 mm*
with W from	351	to	400	mm, H max =	2020 mm*
with W from	401	to	2000	mm, H max =	2600 mm**

\* Up to H = 2600 mm, blind supplied with tilt-only function and locked bottom rail

\*\* For areas from 4.01 m<sup>2</sup> to 5.2 m<sup>2</sup>, blind supplied with tilt-only function and completely raised.