

# SL20-22C Pleated Blackout

ScreenLine® SL20-22C Pleated Blackout is a patented magnetic system with manual operation (raising function) for pleated blackout blinds incorporated within 20-mm or 22-mm double or triple glazing units. It is suited to all areas requiring complete privacy.


The system is equipped with double-projection black (RAL 9005) warm edge spacer bars as standard in order to reduce reflected light, thus favouring complete darkening effect.

The external magnetic device applied on the glass by means of high-resistance adhesive tape contains a cord loop and a magnet that is perfectly interfaced with the magnetic joint of the internal drive, which is completely housed inside the head rail. The movement provided to the cord enables the rotation of the magnets that activate the blind. The cord is kept under tension by means of a special cord tensioner applied on the glass.

SL20-22C Pleated Blackout preserves with time the insulating properties of the double or triple glazing unit, notably protection from dirt or weather conditions. The integrated unit can be fitted into the window frame like standard insulating glass.




## COLOUR RANGE



S102 white/white

## FEASIBILITY CHARTS

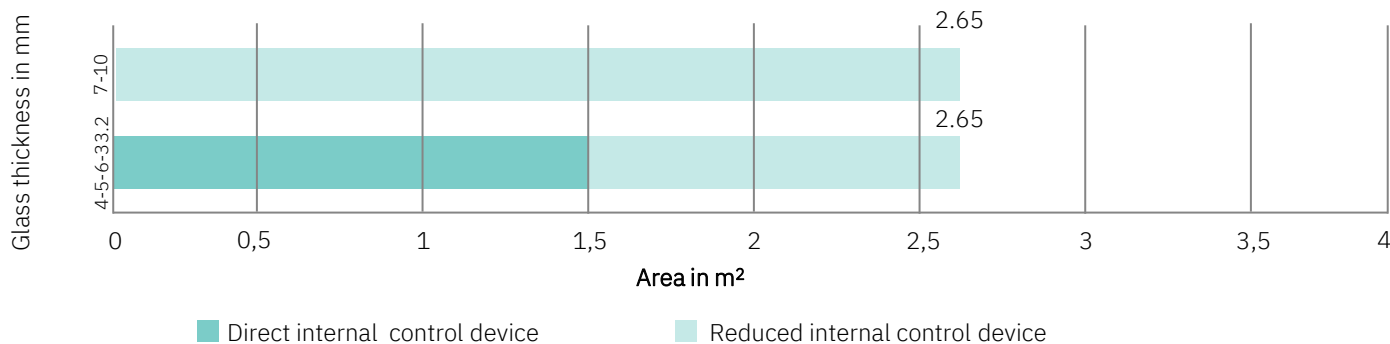

### Possible dimensions

W min = 300 mm    W max = 1200 mm  
H min = 300 mm    H max = 2200 mm

Fabric stack height = 4% glass H + 59 mm

### Maximum height possible according to width

with W from 300 to 350 mm    H max = 1100 mm  
with W from 351 to 400 mm    H max = 1800 mm  
with W from 401 to 1200 mm    H max = 2200 mm