

SL20-22MB Pleated Blackout

ScreenLine® SL20-22MB Pleated Blackout is a motorised system with raising function for pleated Blackout blinds incorporated within 20-mm or 22-mm insulating glass units.

Double-guided spacer bars are suitably coated in order to reduce reflected light, thus favouring complete darkening effect.

The blind is raised or lowered via a device consisting of a brushless motor controlled by a wide range of control units (compatible with the main BMS systems), which allows the simultaneous and synchronised operation of several blinds.

The motor and the entire electronic blind management system are positioned within the head rail, on a specially designed slide that will reduce vibrations, thus making the system very silent.

No other control device is applied on glass or window frame, since the motor is activated by means of wall-mounted push buttons or remote control (options). SL20-22MB is suited to areas that require complete darkening.


The kit can be assembled, mounted and transported very quickly and easily, without special operations, due to the complete lack of wires coming out of the blind.

It ensures with time the insulating properties of the double-glazing unit, notably protection from dirt or weather conditions.

The system is supplied with warm edge spacer bars as standard.




COLOUR RANGE



S102
white/white

FEASIBILITY CHARTS

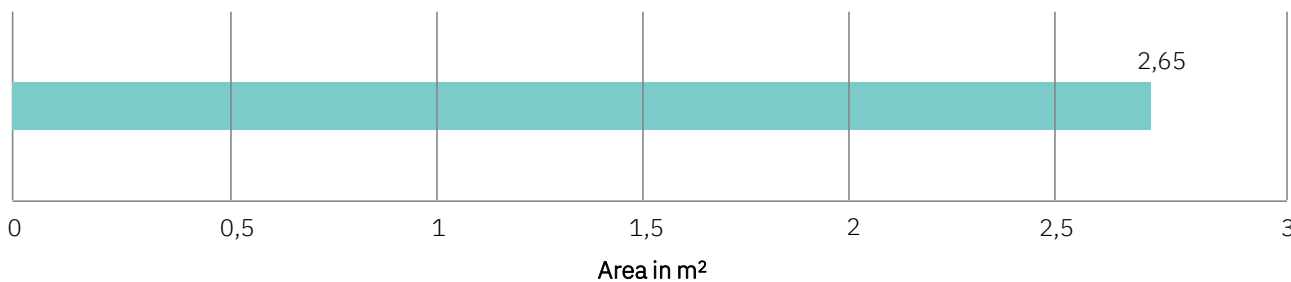

Possible dimensions

W min. 300 mm - W max. 1200 mm
H min. 300 mm - H max. 2200 mm

Stack height: 4% glass H + 73 mm (76 mm
for SL22MB Pleated Blackout)

Maximum height possible according to width

W from 300 to 350 mm: H max 1670 mm
W from 351 to 400 mm: H max 2020 mm
W from 401 to 1200 mm: H max 2200 mm